

# Thermal Silicone Rubber CTLC800

CTLC800 Ultra-high thermal pad is a high-performance thermal conductivity interface material, which is made of imported raw materials and used to fill the air gap between the heating element and the heat sink or metal base. Their flexibility and elasticity make them suitable for covering completely uneven surface. The heat is conducted from the separated device or the entire PCB to the metal casing or the diffusion plate, effectively improving the heat dissipation performance and improving the efficiency and service life of the heating electronic components.



## Product Features

- Excellent thermal conductivity, high thermal conductivity, low thermal resistance.
- High fit, soft and elastic.
- High electrical insulation, protect sensitive electronic devices.
- Natural stickiness, easy to assemble and disassemble.

## Typical Applications

- CPU / memory / high speed hard disk drive.
- Microprocessors, memory chips and graphics processors.
- Automobile engine control module.
- Communication electronic hardware equipment.
- Military electronic equipment.

Electrically Insulating, Thermally Conductive Elastomeric Material


TYPICAL PROPERTIES OF SILICONE RUBBER CTLC800			
Test Item	Unit	CTL800	Test Method
Colour	-	Gray	Visually
Thickness	mm	0.5~5.0	ASTM D374/374M
Hardness	Shore AO	30±5	GB/T531
	Shore OO	70±10	ASTM D2240
Specific Gravity	g/cm <sup>3</sup>	3.55	ASTM D792
Tensile Strength	MPa	0.15	ASTM D412
Elongation at Break	%	24	ASTM D412
Breakdown Voltage	KV/mm	≥7	ASTM D149
Volume Resistivity	Ω·cm	1x10 <sup>11</sup>	ASTM D257
Temp Resistance	°C	-40~200	-
Flame	-	V-0	UL 94
Weight Loss	%	≤0.2	@150°C 240H
Permittivity	@1MHz	8.0	ASTM D150
Thermal Conductivity	W/mk	8.0	ISO 22007-2
Thermal Conductivity	W/mk	8.0	ASTM D5470
Thermal Impedance	°C·in <sup>2</sup> /W	0.207	ASTM D5470
Thermal Impedance	°C·cm <sup>2</sup> /W	1.337	ASTM D5470
Specific Heat Capacity	J/g/k	0.722	ASTM E1269

## Configurations Available:

- Sheet form, die-cut parts
- With or without pressure sensitive adhesive

## Build a Part Number

## Standard Options

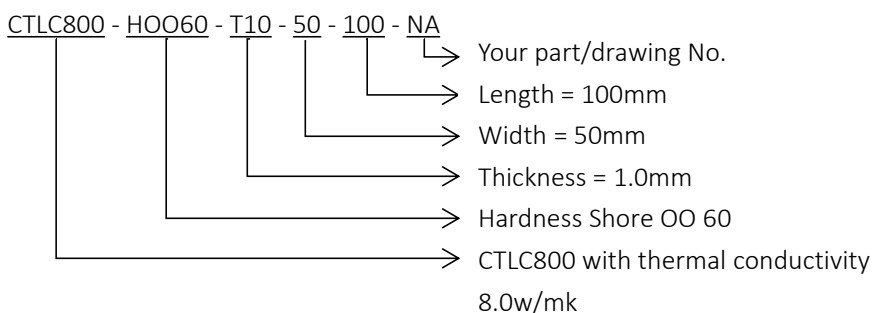

Note: The material can be customized. If you can't find the material that meets your requirements in our existing materials, you can consult the sales manager whether the material you need supports customization, and we will give you a reply within 24H.

[www.coolthermo.com](http://www.coolthermo.com)

CoolThermo - Asia

Phone: 86-133-1690-6731

Skype: 86-133-1690-6731

Email: [info@coolthermo.com](mailto:info@coolthermo.com)

Add: Room 101, No. 214, District 3, Longsheng New Village, Longsheng Community, Dalang Street, Longhua District, Shenzhen 518110

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL, OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.