

# Liquid Gap Filler Thermal Gel CTLCE200

CTLCE200 Single component thermal gel is a kind of thermal conductive material with lower deformation force. It has similar plasticity of plasticized, non flowing, high thermal conductivity and low thermal resistance. It has good insulation, good insulation, and can fill the gap automatically, so that the contact area can reach full contact. It can be applied to the heat dissipation module or electronic component with larger thickness. Unlike thermal grease, thermal gel has no sedimentation and no flow phenomenon. It is suitable for screen printing or scraping. The syringe packaging can be dispensed on standard dispensing equipment, so as to effectively improve operation convenience and efficiency.



## Product Features

- High thermal conductivity, low thermal resistance, good wettability.
- No settlement, no flow, can fill any uneven gap.
- Soft, no stress, can be compressed to 0.1 mm thin.
- The design and application are convenient, and the automatic .
- dispensing can adjust the size of any thickness.

## Typical Applications

- Wireless electronic equipment.
- Communication electronic hardware equipment.
- Automotive electronic application equipment.
- Chassis or related heat dissipation module.
- Host or small office network equipment.
- Microprocessors, memory chips and graphics processors.

Electrically Insulating, Thermally Conductive Elastomeric Material

### TYPICAL PROPERTIES OF THERMAL GEL CTLCE200


Test Item	Unit	CTLCE200	Test Method
Colour	-	Blue	Visually
Specific Gravity	g/cc	2.98	ASTM D792
Extrusion Rate	g/min	≥40	Φ2.54mm90psi
Thickness after compression	mm	0.1	-
Weight Loss	%	≤0.3	@150°C 240H
Breakdown Voltage	KV/mm	≥7	ASTM D149
Volume Resistivity	Ω·cm	1x10 <sup>13</sup>	ASTM D257
Continuous Use Temp	°C	-40~150	-
Thermal Conductivity	W/mk	2.0	ISO 22007-2
Thermal Conductivity	W/mk	2.0	ASTM D5470
Thermal Impedance	°C·in <sup>2</sup> /w	0.090	ASTM D5470
Thermal impedance	°C·cm <sup>2</sup> /W	0.580	ASTM D5470
Specific Heat Capacity	J/g/k	0.856	ASTM E1269

## Configurations Available:

- 30ml, 55ml, 300ml, 2600ml, barrel

## Build a Part Number

CTLCE200 - 300CC

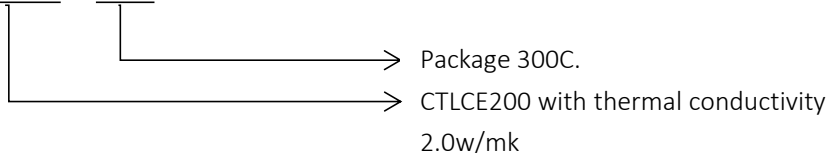

## Standard Options

Note: The material can be customized. If you can't find the material that meets your requirements in our existing materials, you can consult the sales manager whether the material you need supports customization, and we will give you a reply within 24H.

[www.coolthermo.com](http://www.coolthermo.com)

CoolThermo - Asia

Phone: 86-133-1690-6731

Skype: 86-133-1690-6731

Email: [info@coolthermo.com](mailto:info@coolthermo.com)

Add: Room 101, No. 214, District 3, Longsheng New Village, Longsheng Community, Dalang Street, Longhua District, Shenzhen 518110

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL, OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.