


Thermal Paste CTLE100

CTLE100 Thermal grease has excellent thermal conductivity, good reliability, and reliable wettability on copper and aluminum surfaces. It is suitable for interface heat conduction of general CPU, GPU and other heating power devices. Because of its low viscosity, it can fully wet the contact surface and form a low interface thermal resistance, so it can quickly and efficiently transfer heat to the heat dissipation device and apply it on the assembly surface of power device and radiator to help eliminate the air gap on the contact surface, increase the heat flow, reduce the thermal resistance, reduce the working temperature of power device, improve the reliability and prolong the service life.

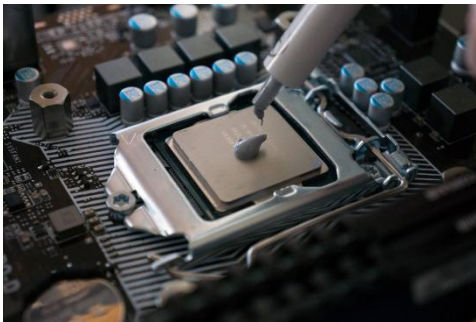

Electrically Insulating, Thermally Conductive Putty

TYPICAL PROPERTIES OF THERMAL GEL CTLE100

Test Item	Unit	CTLE100	Test Method
Colour	-	White	Visually
Density	g/cm ³	1.94	ASTM D
Temp Range	°C	-40~150	-
Weight Loss	%	≤0.3	@150°C 240H
Voltage Withstand	KV/mm	≥6	ASTM D149
BLT	μm	≤20	-
Permittivity	@1MHz	4.24	ASTM D150
Dielectric Loss	@1MHz	1.82x10 ⁻²	ASTM D150
Viscosity	Pa·s	40±5	ASTM E3116
Thermal Conductivity	W/mk	1.0	ISO 22007-2
Thermal Conductivity	W/mk	1.0	ASTM D5470
Thermal impedance	°C·in ² /w	0.017	ASTM D5470
Thermal impedance	°C·cm ² /w	0.110	ASTM D5470
Specific Heat Capacity	J/g/k	1.084	ASTM E1269


Configurations Available:

- 1kg / can, 5kg / can, 10kg / barrel, 20kg / barrel

Build a Part Number

Standard Options

CTLE100 - 1KG

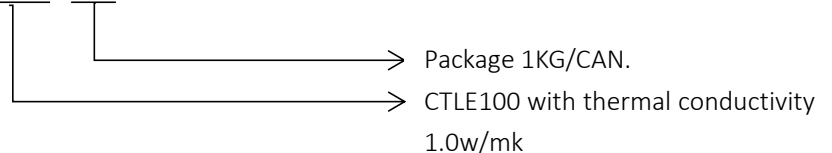

Product Features

- The wettability of the surface can effectively reduce the thermal resistance of the interface.
- Low volatile, long-lasting paste state.
- Precision viscosity, easy to scrape, easy to operate.
- Environmental protection raw materials, no harmful gas release.

Typical Applications

- Between CPU / GPU and radiator.
- Between power supply resistor and bottom seat.
- Thermoelectric cooling device.
- LED lighting and other industries.

Note: The material can be customized. If you can't find the material that meets your requirements in our existing materials, you can consult the sales manager whether the material you need supports customization, and we will give you a reply within 24H.

www.coolthermo.com

CoolThermo - Asia

Phone: 86-133-1690-6731

Skype: 86-133-1690-6731

Email: info@coolthermo.com

Add: Room 101, No. 214, District 3, Longsheng New Village, Longsheng Community, Dalang Street, Longhua District, Shenzhen 518110

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL, OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.